




TUCKUNDER LIFT

LIFTING CAPACITY 3,500 LBS.

- Steel Wedge Tuckunder Lift Gate
 Floor Heights: 3500W 44" Laden/56" Unladen
 Floor Heights: 3500WLB 36" Laden/46" Unladen

SLP STANDARD FEATURES	BENEFITS
1" Solid Steel Lifting Arms	Heavy-Duty and Built to Last
Low P.S.I Due to Larger Piston Area	Lower Pressure Reduces Wear, Extends Motor Life
Manual Transit Lock	Safely Secures Lift Gate in Over-the-Road Position
Pressure Compensated Flow Control	Steady Hydraulic Pressure for Smooth Operation
Bolt-On Power Pack Enclosure Holds Pump and Motor	Easy Installation
Marine Potted Switches	Watertight Switches – Reduces Electrical Failure
Spring Assisted Opening and Closing	Ease of Use and Reduces Physical Effort to Operate
Greaseless Bushings	Reduces Maintenance Costs

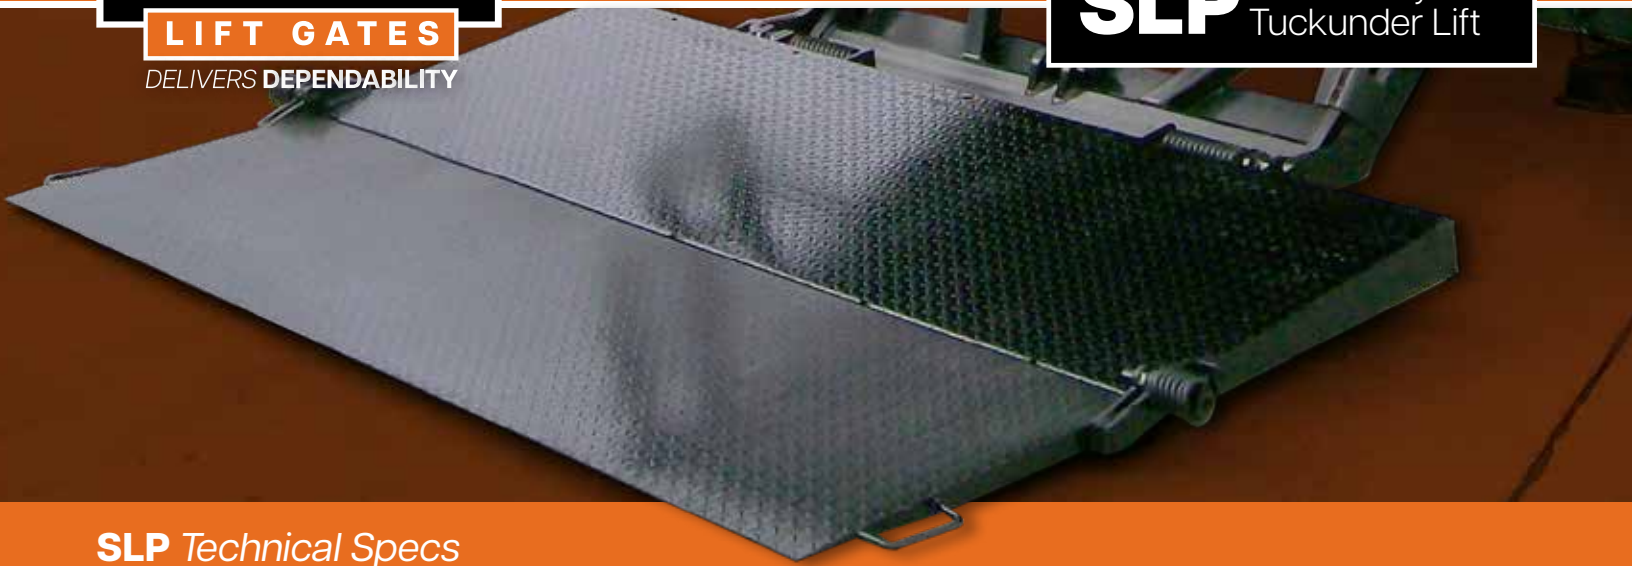

SLP Technical Specs

Model Number	Lifting Capacity	Platform Size		Primary Platform	Secondary Platform	Approx. Weight	Vehicle Width	Vehicle Height
		W"	D"	D"	D"			
SLP 3500W	3,500 lbs.	80"	52"	27"	25"	975 lbs	96" / 102"	44" Laden to 56" Unladen
SLP 3500WLB	3,500 lbs.	80"	50"	25"	25"	975 lbs	96" / 102"	36" Laden to 46" Unladen

AVAILABLE OPTIONS	
OPTION #	DESCRIPTION
111	Additional Circuit Breaker for Supply Line
132-3PL	Plastic Battery Box with Hold Down Straps (Holds Three Batteries)
143	Safety Cut Off Switch
145	Rubber Dock Bumpers
158	Power down for Hide-A-Way®
169	I.C.C. Bumper D.O.T. Approved
201	Hand Held Remote Control, Plugs into Receptacle
215	96" Floor Extension
216	102" Floor Extension
225	Threshold Mounting Tube
233	Heavy Duty Steps
CA-800-545	Cart Stop
P46622	AGM Battery

POWER KITS	
OPTION #	OPTION DESCRIPTION
123-NG	Power Kit: 30' "2" Gauge Cable – NO Trailer Plug
136-NG	Power Kit: 35' "2" Gauge Cable – NO Trailer Plug
257NG-30	Power Kit: 30' "2" Gauge Cable – Dual Pole with Combo Box (Dual/Single Pole Receptacles)
257NG-45	Power Kit: 45' "2" Gauge Cable – Dual Pole with Combo Box (Dual/Single Pole Receptacles)
257NG-60	Power Kit: 60' "2" Gauge Cable – Dual Pole with Combo Box (Dual/Single Pole Receptacles)